

## HOUSEHOLD BATTERY TESTER


Yellow appears in rectangle indicating battery is "GOOD", "OK", or "REPLACE".

### INSTRUCTIONS FOR USE

1. Hold tester with copy side up and circuit side facing battery.
2. Touch and press positive end of battery tester to positive terminal (+).
3. At the same time, wrap, touch and press negative end of battery tester to negative terminal (-).
4. Maintain constant contact with tester for 10-15 seconds.
5. Read 1.5 or 9v indicator:

**REPLACE**-Replace battery. **OK**-Battery usable. **GOOD**-New.

NOTE: Battery Tester is activated by the battery being checked.  
Keep test times as short as possible to avoid unnecessary battery drain.

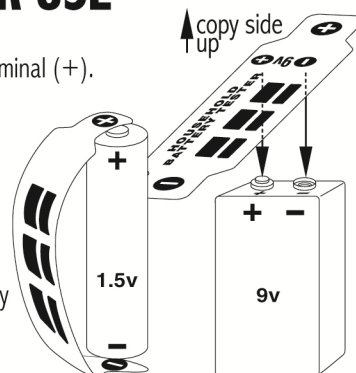

Battery Sizes: 1.5 AAA, AA, C, D, 9v PP3

Patent Pending

Example: 9 volt battery OK.

ACT159

Manufactured by, LCR Hallcrest, Glenview IL 60026

IFU-028 Rev01